


INFEEED CONVEYOR

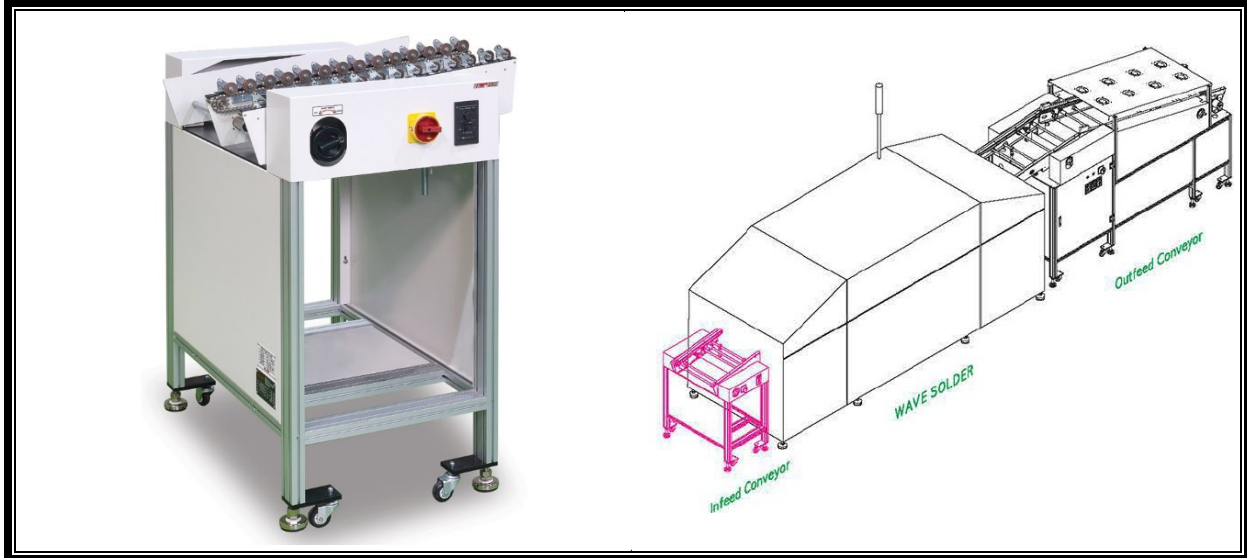


FEATURES

- Always-on driven
- Adjustable angle for conveyor
- Conveyor speed control
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- SMEMA interface
- Conveyor automatic width adjustment
- Touchscreen
- Buzzer
- Front door
- Selectable rail length
- Selectable belt type (ESD, heat resistant, chain, etc.)
- 3 colored LED light tower
- 06B or pin chain

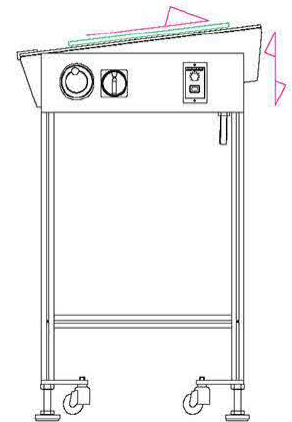

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Weight (Kg)
AIC-60S	S	330 x 250	50 x 50	605 x 620 x 925	0.1kVA	70
AIC-60Y	Y	440 x 330		605 x 700 x 925		80
AIC-60L	L	530 x 375		605 x 745 x 925		90
AIC-60X	XL	530 x 460		605 x 830 x 925		100
AIC-602X	2XL	610 x 460		705 x 830 x 925		110

Custom options available by request