


# MAGAZINE UNLOADER (CE)

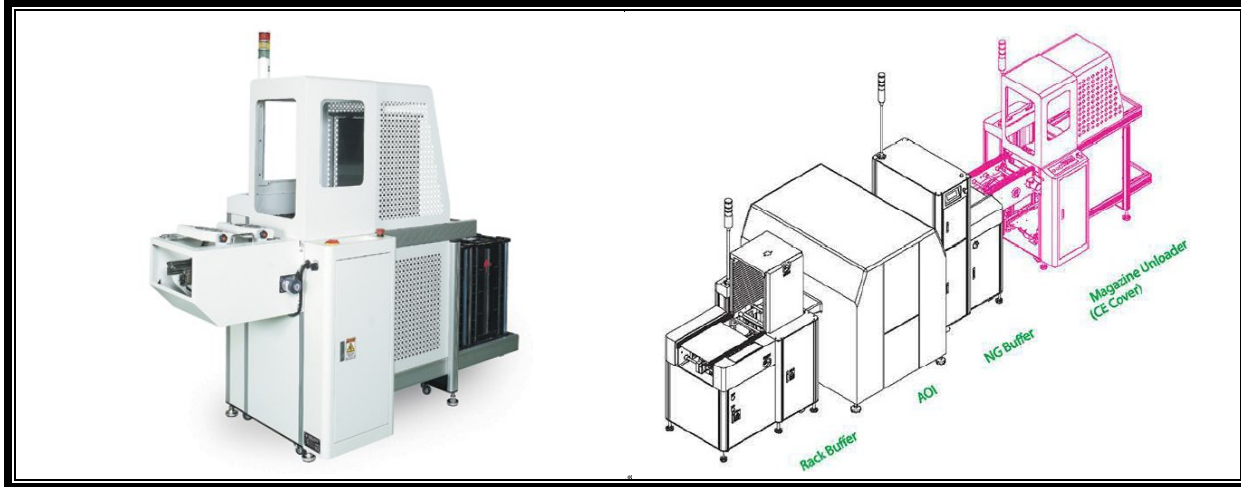


## FEATURES

- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3 color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine-in from upper; Magazine out to lower
- PCB out from bottom to top
- 3 rack magazine capacity (upper - 1 / Lower - 2)
- Safety full cover (lift and magazine)
- 3mm edge clearance at conveyor
- Clearance at conveyor (upper - 25mm / lower - 25mm)

## OPTIONS

- 2 different magazine sizes
- Space saver (Type T)
- High speed magazine exchange (23 sec.)
- 5 rack magazine capacity (Upper - 2 / Lower - 3)
- PCB damage prevention sensor
- Automatic width adjustment
- Conveyor speed controller
- Cooling fan at conveyor
- Dual lane
- RS-485 communication

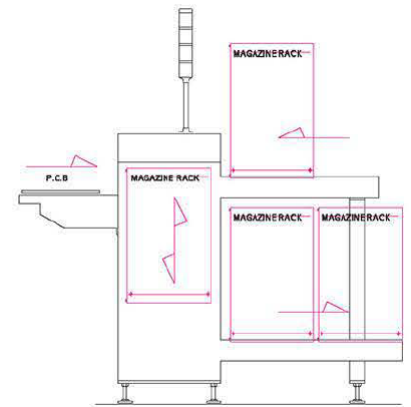

## SPECIFICATIONS

Model	Type	Rack	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
AUD-12CE	S	3	330 x 250	100 x 80	1670 x 810 x 1670	0.3 kVA	0.5 ± 0.1	200
	Y		440 x 330		2080 x 922 x 1670			220
	L		530 x 375		2550 x 1022 x 1670			240
	XL		530 x 460		2550 x 1092 x 1670	260		
	2XL		610 x 460		2820 x 1092 x 1670	0.4kVA		270

Custom options available by request